



EV 34 Utility Pellet Boiler

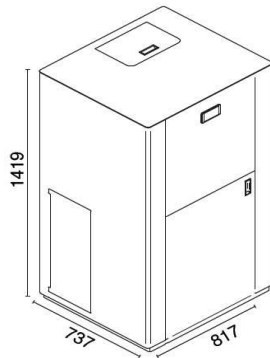

A = Ø 100 mm Scarico fumi / Flue /
Cheminée / Rauchabzug / Evacuación
de humos / Descarga de humos
B = Ø 50 mm Ingresso aria primaria /
Primary air inlet / Entrée d'air primaire
/ Primärlufteinlass / Entrada aire
primario / Admissão de ar primário
C = 3/4 Ritorno riscaldamento /
Heating return / Retour chauffage
/ Heizungsrücklauf / Retorno
calentamiento / Retorno aquecimento
D = 3/4 Andata riscaldamento / Heating flow
/ Départ chauffage / Heizungs-vortlauf
/ Ida calentamiento / Partida do
aquecimento
E = 1/2 Entrata acqua fredda sanitaria /
Incoming cold water / Entrant eau
froide / Einströmende kalte Wasser /
Entrada agua fría sanitaria / Entrada de
água fria sanitária
F = 1/2 Prelievo acqua calda sanitaria /
Sampling hot water / Échantillonnage
de l'eau chaude / Sampling heißem
Wasser / Retirada agua caliente
sanitaria / Recolha de água quente
sanitária

Technical Spec

Total heat output: max 34,0 kW – min 9,5 kW
Water heat output: max 31,5 kW – min 8,5 kW
Energy Efficiency Class: A+
Efficiency: Pmax 94,5% – Pmin 91,5% (to water)
CO emission at 13% O2: Pmax 0,005% – Pmin 0,004%
Pellet consumption: max 7,2 kg/h – min 2,0 kg/h
Reservoir capacity: 90 kg
Heatable room volume: 450 – 850 mc
Minimum distances from walls: side & back 25 cm, front side: 100 cm
Voltage / Frequency: 230 V / 50 Hz
Rated input power: 400 W
Dimension: L 81,7 x P 73,7 x H 141,9 cm
Weight: 314 kg
Steel combustion chamber
Self-cleaning brazier
Complies with: EN 303-5:2012 - BimSchV II - 15a B-VG - LRV/VKF - BAFA
Remote control: Included
WIFI module for remote control: Optional
Removable ash drawer in a separate compartment
Fume outlet: Rear
Self-cleaning brazier
Eco-box self-cleaning
Self-cleaning turbulators

Features

BOILER CLASS 5
Double door
90kg Pellet tank
5 operating power levels
Menu display in 6 languages
Self-cleaning brazier
Unburnt pellet recirculation system
Automatic Eco-box cleaning
Automatic turbulator cleaning
Continuous fan motor operation for optimum silent operation
Removable ash drawer in a separate compartment
High efficiency insulation
Low maintenance
Remote control supplied
Safety thermostat
Suitable for external thermostat
Twin Safety Manostat
Water Pressure Transducer
Timer Thermostat
Circulation pump
Expansion tank
Safety valve

Hamco
STOVES

Hamco Heating Ltd
Cloncollig
Church Road
Tullamore
Co. Offaly
05793 21302
info@hamco.ie
www.hamco.ie