


Debora 15Kw Pellet Stove




A = Ø 80 mm Scarico fumi / Flue / Cheminée / Rauchabzug
 Evacuación de humos / Descarga de fumos
 B = Ø 51 mm Aria combustione / Combustion air / Air de combustion /
 Verbrennungsluft / Aire para la combustión / Ar de combustão
 C = Ø 80 mm Aria canalizzata / Ducted air / Air pulsé / Luftkanalsystem
 Aire canalizado / Ar canalizado

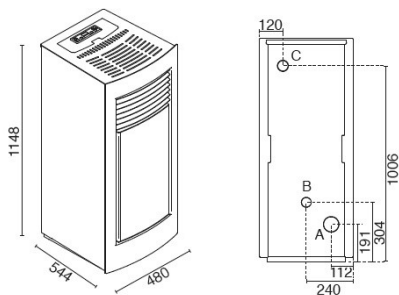

Colour Options

Black
Red
Mustard

PREMIUM DUCTING

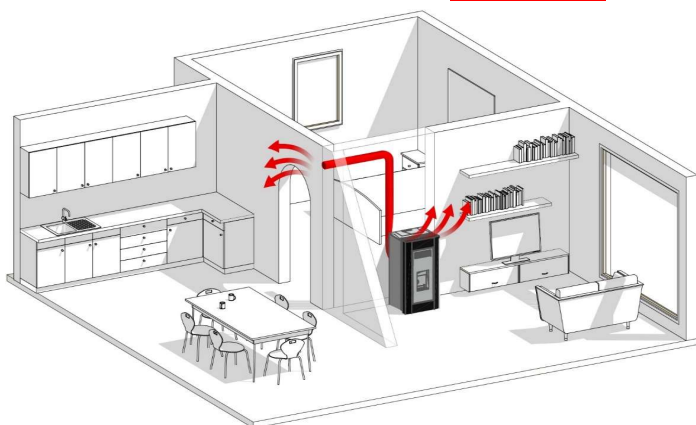

With dual fan to carry the heat a distance of up to 5 metres (via an insulated tube) and heat rooms up to 120 cu.m. Standard in models Debora, Cloe, Beatrice, Zoe, Ines, Gemma

Technical Data

Total heat output: max 15.4kW – min 5.2kW
 Nominal heat output: max 14kW – min 4.5kW
 Efficiency: Pmax 88.4% – Pmin 92.4%
 CO emission at 13% O₂: Pmax 0,012% - Pmin 0,039%
 Pellet consumption: max 3.36kg/h - min 1.07kg/h
 Reservoir capacity: 22kg
 Heatable room volume: 240 – 320 mc
 Minimum clearance: side: 30cm - back: 20cm - front side: 100 cm
 Dimension: W 480 x D544 x H 1148 mm
 Weight: 177 kg
 Cast iron combustion chamber
 Stainless steel brazier
 Canalized stove, double ventilation: Premium
 Complies with: EN14785 - BImSchV II - 15a B-VG - LRV/VKF
 Sliding drawer for ash removal
 Flue outlet: Rear
 Remote control: Optional

Features

Coating with front steel grille
 Forced ventilation
 22 kg Pellet tank
 5 operating power levels
 Menu display in 6 languages
 Cast iron combustion chamber
 Removable ash tray for ash removal
 Removable handle
 PREMIUM channelling (twin fan)
 Suitable for external thermostat
 Safety thermostat
 Safety Manostat
 Timer Thermostat

Hamco
STOVES

Hamco Heating Ltd
 Cloncollig
 Church Road
 Tullamore
 Co. Offaly
 05793 21302
info@hamco.ie
www.hamco.ie